

HiTRON

18-36VDC/36-72VDC INPUT RANGE DC-DC CONVERTER HOT-SWAP CompactPCI QUAD OUTPUT 250 WATTS ACTIVE CURRENT SHARING SWITCHING POWER SUPPLIES HDC250P-24B/48B SERIES



FEATURES:

- 250W 3U X 8HP EUROCARD PACKAGE
- 36-72VDC NOMINAL 48VDC INPUT
- INTERNAL OR-ING DIODES FOR N+1 REDUNDANCY
- HOT-SWAPPABLE
- THIRD-WIRE CURRENT SHARING
- EMI MEET EN 55022 / FCC CLASS B
- CE MARKING COMPLIANCE
- FULLY COMPLIANT WITH PICMG

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typ. 18-36Vdc, nominal input 24Vdc.
Typ. 36-72Vdc, nominal input 48Vdc.

Input Connector: Positronic 47-pin PCIH47M400A1.

Inrush Current: Peak 32.6A at nominal 24Vdc.
Typ. 20A at nominal 48Vdc.

Input Current: 13.7A at nominal input 24Vdc.
6.6A at nominal input 48Vdc.

Dielectric Withstand: Meet IEC 60950-1 regulation.

EMI: Meet EN 55022 / FCC Class B.

Remote ON/OFF: Available at [INH#] & [EN#] pins.

Power Fail Signal: Available at [FAL#] pin.

Status LED: <Green> means valid input voltage.
<Amber> means a critical fault.

Thermal Protection (OTP): Installed NTC for thermal sensor at [DEG#] pin.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.

Output Current: See Ratings Chart.

Output Wattage: Typ. 250W continuous.

Output Connector: Positronic 47-pin PCIH47M400A1.

Line Regulation: Typ. 0.1%.

Load Regulation: Typ. $\pm 2.0\%$.

Noise & Ripple: Typ. 1% Pk.-Pk. or 50mV,
whichever is greater.

OVP: Built-in at all outputs.

Adjustability: Available at VO1, 2 & 3.

Output Trim: Electrical trim available at VO1/2.[ADJ #]

Remote Sensing: Available at VO1, VO2 & VO3.

Hot-Swap: Available.

N+1 Redundancy: Installed with internal OR-ing diodes at all outputs for N+1 redundancy operation.

Current Sharing: Third-wire current sharing at VO1, 2 & 3.

Power OK Signal: Available for all outputs.

Over Current Protection (OCP): Installed in each rail.

Overload Protection (OLP): Fully protected against output overload or short circuit. Typical 120% max. load.
Consult the factory for special OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 74%-77 %.

Switching Frequency: 120K Hz.

Circuit Topology: Forward circuit.

Transient Response: Peak transient less than 100mV and recovers within 2mS for 25% load-change.

Safety Standard: IEC 60950-1 Class I.

Construction: Eurocard 3U X 8HP X 160mm
CompactPCI format. Front panel with either Ordinary handle or Extractor handle.

Operating Temperature: 0 to +50 °C at full load with specified air flow.
Derates linearly to 50% at +70°C.

Storage Temperature: -40 to +85 °C.

Temperature Coefficient: Typ. $\pm 0.02\% / ^\circ\text{C}$.

Cooling: At least 16CFM(500LFM) moving air is required to achieve full rating power 250W in a confined area.

Power Density: 4.58 Watts/ Cubic Inch.

NOTE: (1) All measurement are at nominal input, full load and +25°C unless otherwise specifications.

(2) Due to requests in market and advances in technology, specifications subject to change without notification.



For the details of safety approval, please consult the factory.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

QUAD OUTPUT

MODEL NO.	MAIN +VO1 @★#≡⊙				AUX. +VO2 ▲@★#≡⊙				AUX. +VO3 ▲@★#≡⊙				AUX. -VO4 ●⊙■★=					
	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.	Pk.	Min.	Typ.	Volt.	Max.	Pk.
HDC250P-24B-490(E)	2A	25A	+5V	33A	0A	18A	+3.3V	33A	0A	5A	+12V	5.5A	6A	0A	0.5A	-12V	1A	1.5A
HDC250P-48B-490(E)	2A	25A	+5V	33A	0A	18A	+3.3V	33A	0A	5A	+12V	5.5A	6A	0A	0.5A	-12V	1A	1.5A
HDC250P-48B-490(O)	2A	25A	+5V	33A	0A	18A	+3.3V	33A	0A	5A	+12V	5.5A	6A	0A	0.5A	-12V	1A	1.5A

Symbol: "★" OVP built-in. "@" Adjustable. "#" Remote sensing. "≡" 3rd wire Load Sharing. "⊙" Installed with Or-ing diode.


"▲" Magnetic Amplifier. "●" Installed with Post-regulator. "■" Common Choke.

Remark: Peak load less than 60sec. with duty cycle <10%.


Max. load is the continuous operating load of each rail. But the max. load of each rail can't be drawn from all outputs at the same time.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 666.0 g (23.5 Oz.)

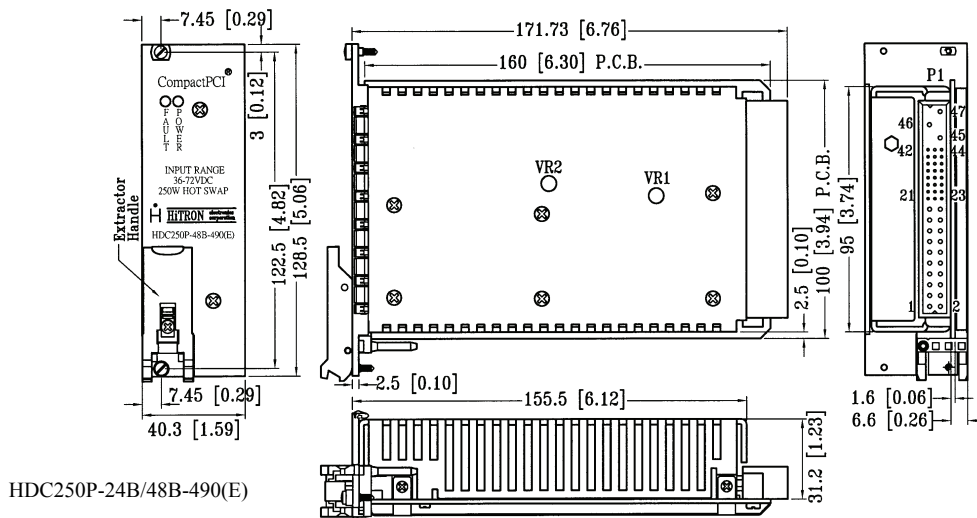

HDC250P-24B/48B-490(E)

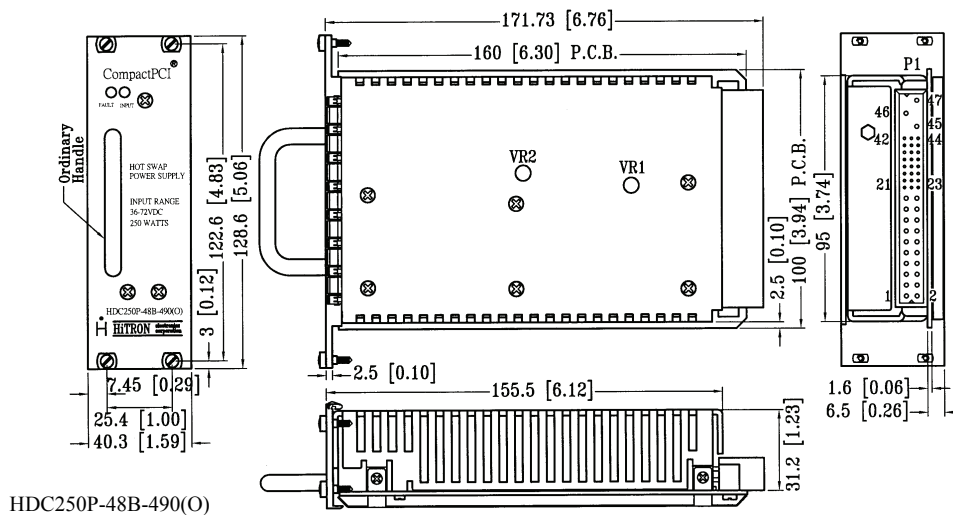

HDC250P-48B-490(O)

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	DC INPUT			QUAD OUTPUT												STATUS/CONTROL					
	-Vin	+Vin	G	VO1	S+	S-	Adj.	C.S.	VO2	S+	Adj.	C.S.	VO3	S+	C.S.	VO4	DC COM	EN#	DEG#	INH#	FAL#
CNTR & PIN #	47	46	45	1,2,3,4	30	34	29	35	13,14,15,16,17,18	33	32	41	20	36	44	21	5,6,7,8,9,10,11,12,19,22,24	27	38	39	42

Mating connector: PCIH47F400A1.