

• **HiTRON**

UNIVERSAL AC INPUT HARMONIC CORRECTION AC-DC INDUSTRIAL DIN- RAIL SINGLE OUTPUT 150 WATTS ACTIVE CURRENT SHARING SWITCHING MODE POWER SUPPLIES HPD150 SERIES



FEATURES:

- ACCOMMODATE UNIVERSAL AC SOURCES IN THE WORLD
- MEET IEC 61000-3-2 HARMONIC CORRECTION
- MEET UNIVERSAL SAFETY STANDARDS AND INDUSTRIAL UL 508
- INDUSTRIAL POWER SUPPLIES FOR SNAP-ON MOUNTING ON DIN-RAILS
- EMI MEET CISPR PUB. 22 & FCC CLASS B
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typ. 90-264Vac universal input.
Input Connector: Phoenix GMSTBA2.5/3-G-7.62.
Input Frequency: 47-63Hz.
Inrush Current: Typ. 30A peak @ 230Vac.
Input Current: 1.6A @ 115Vac, 0.8A @ 230Vac.
Dielectric Withstand: Meet IEC 60950-1.
EMI/RFI: Meet CISPR EN 55022 & FCC B.
Power Factor Correction: Meet Harmonic Correction per IEC 61000-3-2.PF typ.0.96-0.98.
Remote Inhibit: Availabe.
No Load Operation: No damage.
Hold-up Time: 30mS @ 115Vac & 230Vac.
Earth Leakage: Less than 0.40mA @ 230Vac.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.
Output Current: See Ratings Chart.
Output Wattage: Typ. 150W continuous.
Output Connector: Phoenix MSTBA2.5/2-G-5.08.
Line Regulation: Typ. 0.1%.
Load Regulation: Typ. $\pm 1.0\%$.
Noise & Ripple: Typ. 1% peak to peak.
OVP: Built-in.
Remote Sense: Installed.
Adjustability: Available.
Load Sharing: Active current sharing. (Option)
LED Indicator: Output indicating.
Overload Protection (OLP):
 Fully protected against output overload and short circuit.
 Typically set at 115-130% of the output wattage.
 Consult the factory for the special OLP setting.

GENERAL SPECIFICATION

Efficiency: Typ. 83-86%.
Switching Frequency: Fixed frequency 88-92KHz.
Circuit Topology: Fixed freq. forward circuit.
Transient Response: Output voltage returns in less than 3mS following a 25% load change.
Safety Standard: IEC 60950-1/UL 60950-1 Class I.
Power Density: 2.4Watts /Cubic Inch.
Industrial Grade UL 508.

Operating Temperature: -10 to +70°C. Derating from +60 to +70°C by derating 2%/°C.
Storage Temperature: -25 to +85°C.
Temperature Coefficient: Typ. 0.03% /°C.
Cooling: Free air convection cooling for Ta <+60°C.
 Required 20cfm airflow for Ta. >+ 60°C full load operation.
Construction format: Enclosure metal box with DIN-clips format.

Note: Due to requests in market and advances in technology, specifications subject to change without notification..



In application

OUTPUT VOLTAGE / CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	MAIN VO1 @ ★(≡)#		
	TYP.	VOLT.	PEAK
HPD150-S120125	12.5A	12.0V	15.0A
HPD150-S240065	6.5A	24.0V	7.5A
HPD150-S480034	3.4A	48.0V	4.0A


Symbol: "(≡)" Active circuit current sharing. (Option) "★" OVP built-in.

"#" Remote sensing. "@" Adjustable.

Remark: Peak load less than 60sec. with duty cycle <10%.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 1.13kg(2.51 lb.)

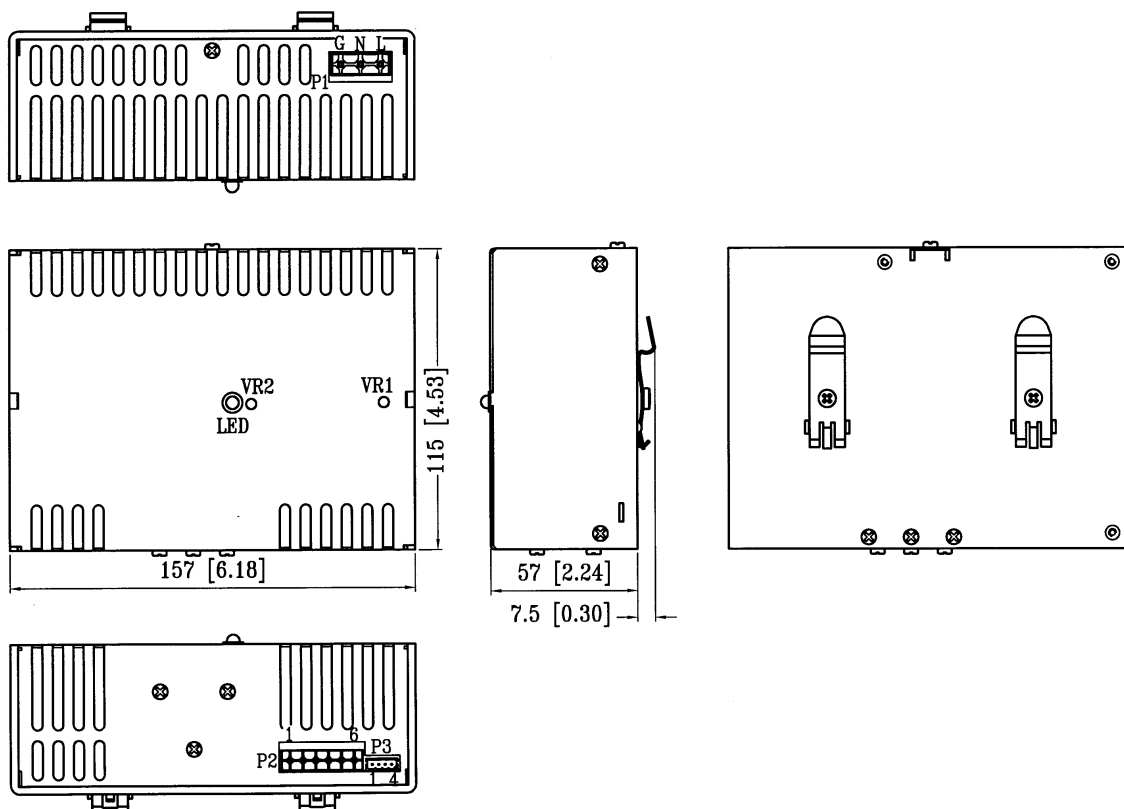

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	AC INPUT			SINGLE OUTPUT		ASSORTED SIGNAL			
	AC-L	AC-N	AC-G	VO1	DC-COM	-SENSING	+SENSING	INHIBIT	C/S
CNTR & PIN #	P1-L	P1-N	P1-G	P2-4,5,6	P2-1,2,3	P3-1	P3-2	P3-3	P3-4

Mating connector: P1 :Phoenix GMSTB2.5/3-ST-7.62

P2: Phoenix MSTB2.5/2-ST-5.08