

# HiTRON

## 36-72VDC INPUT RANGE DC-DC CONVERTER HALF SIZE HOT-SWAP CompactPCI QUAD OUTPUT 202 WATTS ACTIVE CURRENT SHARING SWITCHING POWER SUPPLIES HDC202P-48B SERIES



### FEATURES:

- 202W HALF SIZE 3U X 4HP EUROCARD PACKAGE
- 36-72VDC NOMINAL 48VDC INPUT
- INTERNAL OR-ING DIODES FOR N+1 REDUNDANCY
- HOT-SWAPPABLE
- THIRD-WIRE CURRENT SHARING
- EMI MEET EN 55022 / FCC CLASS A
- CE MARKING COMPLIANCE
- FULLY COMPLIANT WITH PICMG

### SPECIFICATION

#### INPUT SPECIFICATION

**Input Voltage:** Typ. 36-72Vdc, nominal input 48Vdc.  
**Input Connector:** Positronic 47-pin PCIH47M400A1.  
**Inrush Current:** Typ. 20A at nominal input 48Vdc.(Active)  
**Input Current:** 5.6A at nominal input 48Vdc.  
**Dielectric Withstand:** Meet IEC 60950-1 regulation.  
**EMI:** Meet CISPR EN 55022 Class A.  
**Remote ON/OFF:** Available at [INH#] & [EN#] pins.  
**Power Fail Signal:** Available at [FAL#] pin.  
**Status LED:** <Green> means valid input or output voltage.  
                   <Amber> means a critical fault.  
**Thermal Protection (OTP):** Installed NTC for thermal sensor at [DEG#] pin.

#### OUTPUT SPECIFICATION

**Output Voltage:** See Ratings Chart.  
**Output Current:** See Ratings Chart.  
**Output Wattage:** Typ. 202Watt continuous.  
**Output Connector:** Positronic 47-pin PCIH47M400A1.  
**Line Regulation:** Typ. 0.2%.  
**Load Regulation:** Typ.  $\pm 1-2.0\%$ .  
**Noise & Ripple:** Typ. 1% peak to peak or 50mV, whichever is greater.  
**OVP:** Built-in at all outputs.  
**Adjustability:** Available at VO1,2&3.  
**Remote Sensing:** Available at VO1,2&3.  
**Hot-Swap:** Available.  
**N+1 Redundancy:** Installed with OR-ing diodes at all outputs for N+1 redundancy.  
**Current Sharing:** Third-wire current sharing at VO1,2&3.  
**Power OK Signal:** Available for all outputs.  
**Over Current Protection (OCP):** Installed at each rail.  
**Overload Protection (OLP):**  
 Fully protected against output overload or short circuit.  
 Typ. set at 105-130% max. load.  
 Consult the factory for special OLP setting.

#### GENERAL SPECIFICATION

**Efficiency:** Typical 77%.  
**Switching Frequency:** 305-330KHz.  
**Circuit Topology:** Forward circuit.  
**Transient Response:** Peak transient less than 200mV and returns to within 1% less than 200uS for 25% load-change.  
**Safety Standard:** IEC 60950-1 Class I.  
**Construction:** Eurocard 3U x 4HP x 160mm half-size CompactPCI Front Panel with Extractor handle.  
**Operating Temperature:** 0 to +50°C at full load with specified air flow. Derates linearly to 50% at +70°C.  
**Storage Temperature:** -40°C to +85°C.  
**Temperature Coefficient:** Typ.  $\pm 0.02\% / ^\circ\text{C}$ .  
**Cooling:** At least 30CFM (800LFM) moving air is required to achieve full rating power 200W in a confined area.  
**Power Density:** 7.40 Watts /Cubic Inch.

NOTE: (1)All measurement are at nominal input, full load and +25°C unless otherwise specifications.

(2)Due to requests in market and advances in technology, specifications subject to change without notification..

# OUTPUT VOLTAGE / CURRENT RATINGS CHART

## QUAD OUTPUT

MODEL NO.	MAIN +VO1 @★#≡⊙				AUX. +VO2 ▲★#≡⊙@				AUX. +VO3▲★#≡⊙@					AUX. -VO4 ▲⊙★=				
	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.	Pk.	Min.	Typ.	Volt.	Max.	Pk.
HDC202P-48B-490	2.0A	25A	+5V	30A	0A	10A	+3.3V	20A	0.3A	3A	+12V	5A	5.5A	0A	0.5A	-12V	1A	1.5A

Symbol: "★" OVP built-in. "@" Adjustable. "#" Remote sensing. "≡" 3rd- wire Load Sharing. "=" Droop Current Sharing. "⊙" Installed with Or-ing diode.


"▲" Magnetic Amplifier. "●" Installed with Post Regulator.

Remark: Peak load less than 60sec. with duty cycle <10%.

Max. load is the continuous operating load of each rail. But the max. load of each rail can't be drawn from all outputs at the same time.

## MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 469.0g (16.5 Oz.)

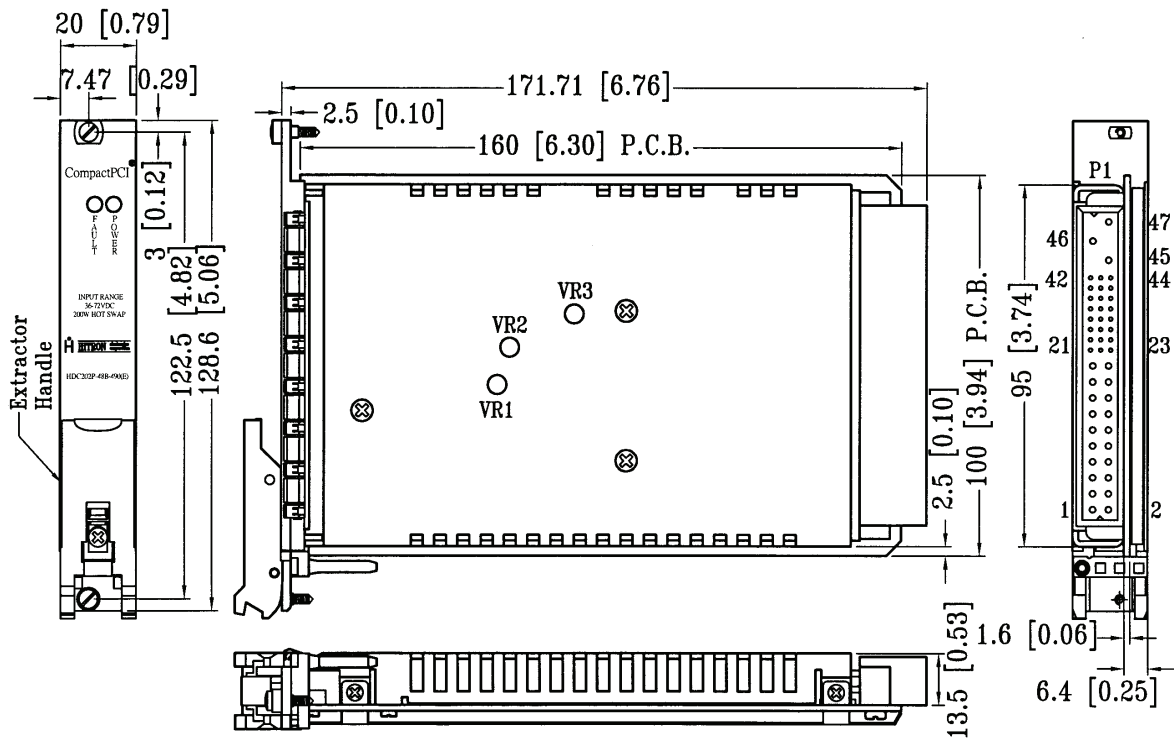

## INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	DC INPUT			QUAD OUTPUT											STATUS/CONTROL				
	-Vin	+Vin	G	VO1	S+	S-	C.S.	VO2	S+	C.S.	VO3	S+	C.S.	VO4	DC COM	EN#	DEG#	INH#	FAL#
CNTR & PIN #	47	46	45	1,2,3,4	30	34	35	13,14,15,16,17,18	33	41	20	36	44	21	5,6,7,8,9,10,11,12,19,24	27	38	39	42

Mating connector: PCIH47F400A1.