

HiTRON

UNIVERSAL INPUT AC-DC MEDICAL APPLICATION INTERNAL OPEN FRAME SWITCHING POWER SUPPLIES 19-20 WATTS SINGLE & MULTIPLE OUTPUT HMI19 SERIES



FEATURES:

- ACCOMMODATE UNIVERSAL AC INPUT
- MEET MEDICAL STANDARD IEC 60601-1
- EARTH LEAKAGE CURRENT < 0.3mA
- COOLING BY FREE AIR CONVECTION
- EMI MEET EN 55011 / FCC CLASS B
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Typical 90-264Vac.
Input Connector: Molex connector or equivalent.
Input Frequency: 47-63Hz.
Inrush Current: 16A at 230Vac.
Input Current: Typical 0.4A at 115Vac, 0.22A at 230Vac.
Dielectric Withstand: Meet IEC 60601-1.
EMI: Meet EN55011 / FCC Class B.
Hold-up Time: Typical 14mS at 115Vac.
Typical 70mS at 230Vac.
Leakage Current: Less than 0.10 mA.

OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart.
Output Current: See Ratings Chart.
Output Wattage: Typical 19-20 Watts.
Output Connector: Molex 5273 or 41671.
Line Regulation: Typical 0.2-1.0%.
Load Regulation: Main VO1 typical $\pm 1.0\%$.
Aux. VO2 typical $\pm 2-3.0\%$ (Stacked).
Aux. VO3 typical $\pm 1-2.0\%$ (P.R.).
Noise & Ripple: Typical 1% peak to peak.
OVP: Built-in at main output VO1.
Adjustability: Factory set.
Over Load Protection (OLP):
Fully protected against overload or short circuit.
Typical 120-150% max. load.
Consult the factory for special OLP setting.

GENERAL SPECIFICATION

Efficiency: Typical 73%. (various with output voltage)
Switching Frequency: 67K Hz.
Circuit Topology: Fixed-frequency Flyback Circuit.
Transient Response: Output voltage returns in
less than 0.2mS following a 25% load change.
Safety standard: Meet Medical standards UL60601-1/
EN 60601-1 Class I.
Operating Temperature: 0 to +50°C.
Storage Temperature: -20 to +85°C.
Temperature Coefficient: Typ. 0.04% /°C.
Cooling: Free air convection.
Construction: L-Bracket open frame format.
Power Density: 1.34 Watts / Cubic Inch.

NOTE: (1) All measurements are at nominal input, full load and +25°C unless otherwise specified.

(2) Due to requests in market and advances in technology, specifications subject to change without notification.



In application.

OUTPUT VOLTAGE / CURRENT RATINGS CHART

SINGLE OUTPUT

MODEL NO.	MAIN VO1@★		
	Typ.	Volt.	Max.
HMI19-S033050	5.0A	+3.3V	6.0A
HMI19-S050043	4.3A	+5.0V	5.0A
HMI19-S120017	1.7A	+12.0V	2.0A
HMI19-S240009	0.9A	+24.0V	1.0A

DUAL OUTPUT

MODEL NO.	MAIN VO1@★			AUX. VO2 † or ●			
	Typ.	Volt.	Max.	Typ.	Volt.	Max.	Pk.
HMI19-D033I	4.0A	+3.3V	5.0A	0.3A	+12V	0.6A	1A
HMI19-D033M	4.0A	+3.3V	5.0A	0.3A	+24V	0.5A	1A
HMI19-D050M	4.0A	+5.0V	5.0A	0.3A	+24V	0.5A	1A
HMI19-D050I	4.0A	+5.0V	5.0A	0.3A	+12V	0.6A	1A


TRIPLE OUTPUT

MODEL NO.	MAIN VO1@★			AUX. VO2 †				AUX. VO3 ●			
	Typ.	Volt.	Max.	Typ.	Volt.	Max.	Pk.	Typ.	Volt.	Max.	Pk.
HMI19-T033II	4.0A	+3.3V	5.0A	0.5A	+12V	1.0A	2A	0.3A	+12V	0.6A	1A
HMI19-T033MI	4.0A	+3.3V	5.0A	0.3A	+24V	0.5A	1A	0.3A	+12V	0.6A	1A
HMI19-T050II	3.0A	+5.0V	4.0A	0.5A	+12V	1.0A	2A	0.3A	+12V	0.6A	1A
HMI19-T050MI	3.0A	+5.0V	4.0A	0.3A	+24V	0.5A	1A	0.3A	+12V	0.6A	1A
HMI19-T050KK	3.0A	+5.0V	4.0A	0.4A	+15V	0.8A	1A	0.3A	-15V	0.6A	1A

Symbol: "★" OVP built-in. "@" Adjustable. "●" Installed with Post Regulator (P.R.). "†" Stacked-on main O/P.

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 373.0g (13.2 Oz.)

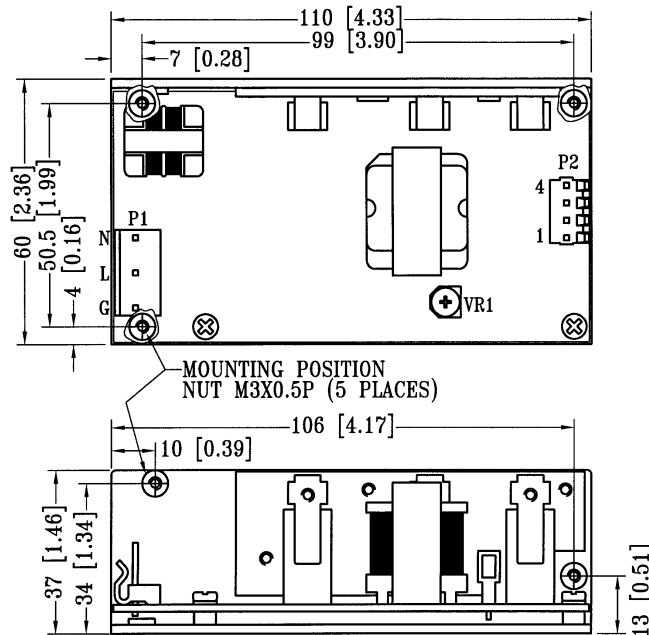

INPUT & OUTPUT CONNECTORS PIN ASSIGNMENT

ASSIGNMENT	AC INPUT			SINGLE OUTPUT			DUAL OUTPUT				TRIPLE OUTPUT			
	AC-L	AC-N	AC-G	VO1	N/A	DC COM.	VO1	VO2	N/A	DC COM.	VO1	VO2	VO3	DC COM.
CNTR & PIN #	P1-L	P1-N	P1-G	P2-2	P2-3,4	P2-1	P2-2	P2-4	P2-3	P2-1	P2-2	P2-3	P2-4	P2-1

Mating connector: P1: Molex 5195 or 5239 series. P2: Molex 5195 or 5239 series/ 3069 series.